

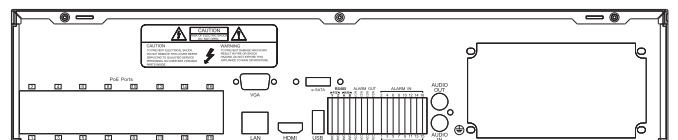


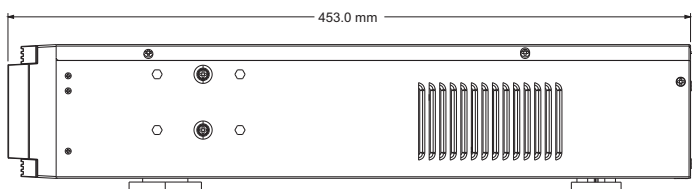

QVIS® | 32 CH PoE NVR HDMI DISPLAY

FEATURES:

- Support 32 CH 8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P IP input
- Adopt standard H.265 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: manual / timer / motion / sensor
- Playback : 16 CH simultaneous playback
- Search : time slice, time, event (manual, sensor, motion), tag search
- Express and flexible backup via USB, network and so on
- Pentaplex : preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol and CMS supported
- Remote control via IE or CMS : preview, playback, backup, PTZ and configuration
- 16 PoE network ports, support IPC direct connection to NVR; support PoE power supply
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phone and PAD
- Powerful smart phone & Pad surveillance with iOS and Andriod OS

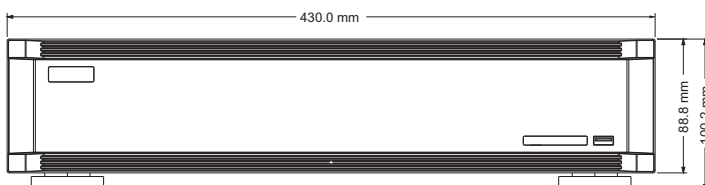



SPECIFICATION	VIPER-NVRPRO-32
SYSTEM	
Compression	Standard H.265
OS	Embedded Linux
VIDEO	
Network Input	32 CH IPC input
Network Access Bandwidth	256Mbps
Network Access Format	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P@25 / 30fps
Output	HDMI × 1 : 4K × 2K / 1920 × 1080 / 1280 × 1024 VGA × 1 : 1920 × 1080 / 1280 × 1024
AUDIO	
Network Input	32 CH IPC audio input
Output	RCA × 1
Two-way audio	RCA × 1
RECORD	
Resolution	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P
Record Stream	Dual stream recording
Mode	Manual, timer, motion, sensor
PLAYBACK	
Simultaneous Playback	Max 16 CH
Search	Time slice / time / event / tag search
Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
Function	Play, pause, FF, FB, digital zoom, etc.
ALARM	
Mode	Manual, sensor, motion, exception
Input	16 CH local alarm input, support IPC alarm input
Output	4 CH
Triggering	Record, snap, preset, e-mail, etc.
NETWORK	
Interface	R J45 10 / 100 / 1000 Mbps × 1
PoE Port	RJ45 × 16
Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP
Web Client	Max 10 users online
MOBILE DEVICE	
OS	iOS, Andriod
STORAGE	
HDD	SATA × 8, e-SATA × 1, max 8T per HDD
BACKUP	
Local Backup	U disk, USB mobile HDD
Network Backup	Yes
PORT	
USB	USB 2.0 × 1 (front panel), USB 3.0 × 1 (rear panel)
Remote Controller	Yes
OTHERS	
Power Supply	ATX
Consumption	≤ 15W (without HDD)
Dimensions (mm)	430 × 453 × 89 (W × D × H)
Work Environment	-10°C ~ +50°C , 10% ~ 90% humidity