

PURETECH

SECURITY, FIRE & SMART HOME SPECIALISTS

RapiDetect™ | **AJAX <READY>**

Solar-Power Rapid Deployment Tower

TECHNICAL DATASHEET

CODE: RAPIDTECT.41



PURETECH

TOMORROW'S TECHNOLOGY TODAY

0345 863 9750

POWERFUL PORTABLE SOLAR-POWERED PROTECTION

TECHNICAL DATASHEET

RapiDetect | **AJAX** < READY > | **PURETECH**

Solar-Power Rapid Deployment Tower



OVERVIEW - RAPIDTECT

Introducing our rapid deployment alarm unit, the perfect solution for sites with little existing infrastructure. Our wireless and solar-powered unit offers complete perimeter protection with the added advantage of cameras for clear identification of potential intruders. Equipped with an Ajax system, it is fully compatible with mobile apps. With its ease of deployment, you can rest assured that your site is secure, no matter the location.

WHY CHOOSE RAPIDTECT?

- ✓ Visual Verification of Alarms
- ✓ Solar & Battery Powered
- ✓ Filters Out False Triggers (Wildlife etc).
- ✓ Compliant with Manual Handling Regulations
- ✓ 15m 360° Intruder Detection Zone

APPLICATIONS



- ✓ Outdoor Events
- ✓ Construction Sites & Vacant Properties
- ✓ Agricultural Equipment/Assets/Livestock
- ✓ Remote Facilities

COMPONENTS

EXTERNAL SIREN
Adjustable volume,
up to 110dB

EXTERNAL CAMERA
PIR detector with
visual alarm verification

TALL ENCLOSURE
Acts as an effective
visual deterrent

4X SOLAR PANELS
For consistent power
and ease of install onsite



Information is subject to change without notice.

TECHNICAL DATASHEET

RapiDetect | **AJAX** < READY > | **PURETECH**

Solar-Power Rapid Deployment Tower




BUILD PROFILE

Device	Quantity
30W Solar Panel	x4
Bluetooth Enabled Smart Solar Controller	x1
12V 36Ah Lithium Iron Phosphate Battery	x1
Ajax Hub	x1
Ajax Cameras PIRs	x4
Ajax External Siren	x1

RAPIDETECT DIMENSIONS & WEIGHTS

Information	Measurements
Height	Approx. 1470mm
Length	Approx. 650mm
Bottom Section	Approx. 24kg
Middle Section	Approx. 14kg
Top Section Weight	Approx. 2kg

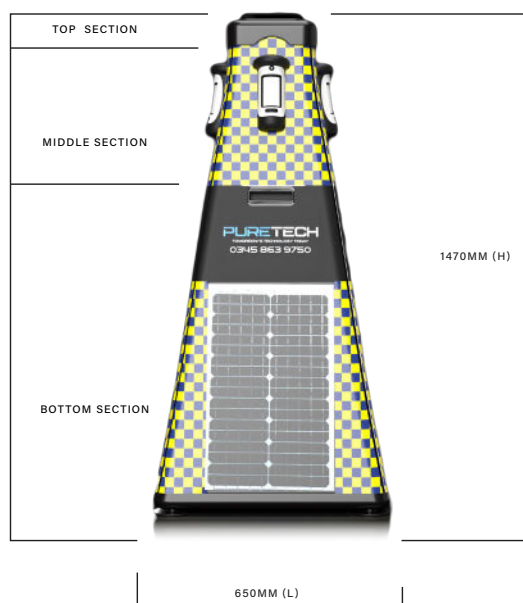

WHY CHOOSE RAPIDETECT?

- ✓ Visual Verification of Alarms
- ✓ Solar & Battery Powered
- ✓ Filters Out False Triggers (Wildlife etc).
- ✓ Compliant with Manual Handling Regulations
- ✓ 15m 360° Intruder Detection Zone

APPLICATIONS



- ✓ Outdoor Events
- ✓ Construction Sites & Vacant Properties
- ✓ Agricultural Equipment/Assets/Livestock
- ✓ Remote Facilities

Information is subject to change without notice.

TECHNICAL DATASHEET

RapiDetect | **AXX <READY>** | **PURETECH**

Solar-Power Rapid Deployment Tower



30W SOLAR PANELS

Specifications - SPMO40301200

Nominal Voltage ($\pm 3\%$ Tolerance)	12V
Cell Type	Monocrystalline
Number of Cells in Series	36
Maximum System Voltage	1000V
Temperature Co-Efficient of MPP (%)	-0.45/ $^{\circ}\text{C}$
Temperature Co-Efficient of Voc (%)	-0.35/ $^{\circ}\text{C}$
Temperature Co-Efficient of Isc (%)	+0.04/ $^{\circ}\text{C}$
Temperature Range	-40 $^{\circ}\text{C}$ ~85 $^{\circ}\text{C}$
Surface Maximum Load Capacity	200 kg/m ²
Allowable Hail Load	23 m/s, 7.53kg
Junction Box Type	PV-LH0805
Cable Type	No Cable
Output Tolerance	$\pm 3\%$
Frame	Aluminium
Dimensions	560mm x 350mm x 25mm
Weight	2.2kg

WHY CHOOSE RAPI-DETECT?

- ✓ Visual Verification of Alarms
- ✓ Solar & Battery Powered
- ✓ Filters Out False Triggers (Wildlife etc).
- ✓ Compliant with Manual Handling Regulations
- ✓ 15m 360 $^{\circ}$ Intruder Detection Zone

APPLICATIONS



- ✓ Outdoor Events
- ✓ Construction Sites & Vacant Properties
- ✓ Agricultural Equipment/Assets/Livestock
- ✓ Remote Facilities

Information is subject to change without notice.

TECHNICAL DATASHEET

RapiDetect | **AXX <READY>** | **PURETECH**

Solar-Power Rapid Deployment Tower



BLUETOOTH ENABLED SMART SOLAR CONTROLLER

Specifications - MPPT-75/10

Battery Voltage (Auto-Select)	12/24 V
Rated Charge Current	10A
Nominal PV Power, 12V	145W
Nominal PV Power, 24V	290W
Maximum PV Short Circuit Current	13A
Automatic Load Disconnect	Yes
Maximum PV Open Circuit Voltage	75V
Peak Efficiency	98%
Self Consumption - Load On	12V: 19mA / 24V: 16mA
Self Consumption - Load Off	12V: 10mA / 24V: 8mA
Charge Voltage: 'Absorption'	14.4V / 28.8V (Adjustable)
Charge Voltage: 'Float'	13.8V / 27.6V (Adjustable)
Charge Algorithm	Multi-Stage Adaptive
Temperature Compensation	-16 mV / °C resp. -32mV / °C
Maximum Continuous Load Current	15A
Low Voltage Load Disconnect	11.1V / 22.2V / 44.4V or 11.8V / 23.6V / 47.2V or Battery Life Algorithm
Low Voltage Load Reconnect	13.1V / 26.2V / 52.4V or 14V / 28V / 56V or Battery Life Algorithm
Protection	Output Short Circuit / Overheat
Operating Temperature	-30°C~60°C (Full Rated Output Up To 40°C)
Operating Humidity	95%; Non-Condensing
Communication	Bluetooth
Colour	Blue (RAL 5012)
Power Terminals	6mm ² / AWG10
Protection Category	IP43 (Electrical Components) / IP22 (Connection Area)
Weight	0.5kg
Dimensions (H x W x D)	100mm x 113mm x 40mm
Safety Certifications	EN/IEC 62109-1, UL 1741, CSA C22.2
Maximum PV Open Circuit Voltage	75V
Data Stored	Battery voltage, current and temperature, as well as load output current, PV voltage and PV current.
Number of Days Trend Data is Stored	46

WHY CHOOSE RAPIDETECT?

- ✓ Visual Verification of Alarms
- ✓ Solar & Battery Powered
- ✓ Filters Out False Triggers (Wildlife etc).
- ✓ Compliant with Manual Handling Regulations
- ✓ 15m 360° Intruder Detection Zone

APPLICATIONS



- ✓ Outdoor Events
- ✓ Construction Sites & Vacant Properties
- ✓ Agricultural Equipment/Assets/Livestock
- ✓ Remote Facilities

Information is subject to change without notice.

TECHNICAL DATASHEET

RapiDetect | **AXX <READY>** | **PURETECH**

Solar-Power Rapid Deployment Tower



12V 36Ah LITHIUM IRON PHOSPHATE BATTERY

Specifications - SLAUMXL136-12

Nominal Voltage	12.6V
Rated Capacity (20 Hour Rate)	36Ah
Terminal	M6
Capacity Retention	>80% at 28 Days
Cycle Life	>80% at 1500 Cycles
1.5 Hour Discharge to 10.5V	9.0A
Internal Resistance	<80 mΩ
Charge Voltage	14.4±0.1V
Charge Current	<40A
Continuous Current	50A
Maximum Pulse Current	150A (<5ms)
Discharge Cut-Off Voltage	8V
Charge Temperature	-20°C~60°C (-4°F~140°F)
Discharge Temperature	0°C~45°C (32°F~113°F)
Storage Temperature	-20°C~60°C (-4°F~140°F)
Dimensions (H x W x D)	172mm x 133mm x 194mm
Weight	4.3kg

WHY CHOOSE RAPIDETECT?

- ✓ Visual Verification of Alarms
- ✓ Solar & Battery Powered
- ✓ Filters Out False Triggers (Wildlife etc).
- ✓ Compliant with Manual Handling Regulations
- ✓ 15m 360° Intruder Detection Zone

APPLICATIONS



- ✓ Outdoor Events
- ✓ Construction Sites & Vacant Properties
- ✓ Agricultural Equipment/Assets/Livestock
- ✓ Remote Facilities

Information is subject to change without notice.

TECHNICAL DATASHEET

RapiDetect | **AJAX** <READY> | **PURETECH**

Solar-Power Rapid Deployment Tower



THE AJAX HUB 2 (4G)

Specifications

Colour	White/Black
Users	Up to 50
Scenarios	Up to 32
Security Groups	Up to 9
Communication Channels	Ethernet, 2 micro-SIM Card slots, 2G/3G/4G (LTE)
Communication Range	Up to 2000 meters in a line of sight
Types of Notification	Push Notifications / Phone Calls / SMS
Sending Photo in Case of Alarm	Photo Delivery Time: Up to 9 Seconds; Photo Resolution: Up to 640x480px Photos in a Series: 1 to 5
Support of Central Monitoring Station Communication Protocols	Sur-Gard (Contact ID), SIA (DC-09), Proprietary Protocols.
Support of Monitoring Software	PRO Desktop
Power Supply	8-32 V up to 1A (with 12-24V PSU fitted)
Backup Battery	Li-Ion 2Ah; Up to 16h Battery Life with Ethernet Disabled
Jeweller Radio Protocol	Two-way communication channel Detector ping interval: 12-300 seconds
Wings Radio Protocol	Proprietary wireless communication technology to transmit photo verifications.
Frequency Hopping	Yes
Radio Frequency Bands:	866.0 - 866.5 MHz 868.0 - 868.6 MHz 868.7 - 869.2 MHz 905.0 - 926.5 MHz 915.85 - 926.5 MHz 921.0 - 922.0 MHz (depends on the region of sale)
IP Rating	IP50
Operating Temperature	-10°C~40°C
Operating Humidity	Up to 75%
Anti-Sabotage	Forgery prevention; Notifications about jamming; Tamper to detect back lid opening and unmounting
Dimensions	163mm x 163mm x 36mm
Weight	0.362kg

WHY CHOOSE RAPIDETECT?

- ✓ Visual Verification of Alarms
- ✓ Solar & Battery Powered
- ✓ Filters Out False Triggers (Wildlife etc).
- ✓ Compliant with Manual Handling Regulations
- ✓ 15m 360° Intruder Detection Zone

APPLICATIONS



- ✓ Outdoor Events
- ✓ Construction Sites & Vacant Properties
- ✓ Agricultural Equipment/Assets/Livestock
- ✓ Remote Facilities

Information is subject to change without notice.

TECHNICAL DATASHEET

RapiDetect | AJAX <READY> | PURETECH

Solar-Power Rapid Deployment Tower



AJAX PIR WITH BUILT IN CAMERA

Specifications

Classification	Electro-Optical Radio Channel Security Detector
Sensing Element	2x PIR Sensor
Motion Detection Distance	Adjustable, from 3m to 15m
Pet Immunity	Animals Up To 80cm Tall
Sensitivity	Adjustable, 3 Levels
Motion Detector's Viewing Angle	Horizontal – 90° Vertical – 80°
Camera Angle	Horizontal – 105° Vertical – 50°
TV Distortion (EBU standard)	Barrel –17%
Photo Resolution:	320 × 176 pixels (by default) 640 × 352 pixels (Shooting series up to 5 photos)
Infrared Light for Shooting in the Dark	Yes
Power Supply	4x CR123A Batteries
Jeweller Radio Protocol	Communication range with a hub – up to 1,700 m in an open space. Two-way communication between hub and device. Self-adjusting RF output power – up to 20 mW Block encryption with a dynamic key Detector polling period – 12–300 s Frequency hopping
Alarm Delivery Time	0.15s
Temperature Sensor	Yes
Wings Radio Protocol	Transmission of a series of photos Photo delivery time with a default settings: up to 9 seconds
IP Rating	IP55
Anti-Sabotage	Anti-masking; Protection against forgery; Jamming detection; Tamper-resistant
Dimensions	206mm x 108mm x 93mm
Weight	0.47kg

WHY CHOOSE RAPIDETECT?

- ✓ Visual Verification of Alarms
- ✓ Solar & Battery Powered
- ✓ Filters Out False Triggers (Wildlife etc).
- ✓ Compliant with Manual Handling Regulations
- ✓ 15m 360° Intruder Detection Zone

APPLICATIONS



- ✓ Outdoor Events
- ✓ Construction Sites & Vacant Properties
- ✓ Agricultural Equipment/Assets/Livestock
- ✓ Remote Facilities

Information is subject to change without notice.

TECHNICAL DATASHEET

RapiDetect | **AXX <READY>** | **PURETECH**

Solar-Power Rapid Deployment Tower



EXTERNAL SIREN

Specifications

Classification	Warning Device with LED Indicators (Outdoor Siren)
Type of Detector	Wireless
Installation	Outdoor/Indoor
Type of Notification	Sound/Light
Sound Volume Level	Adjustable, 85–113 dB at a Distance of 1m
Alarm Duration	Adjustable; 3s to 3min
Indication of Armed/Dis-armed Status	Yes
Power Supply	Battery: Four CR123A batteries, 3 V Mains supply: DC 12 V±20%
Battery Life	5 Years
Jeweller Radio Protocol	Communication range with central unit – up to 1,500 m in an open space Two-way communication between devices Radio frequency bands: 866.0 – 866.5 MHz 868.0 – 868.6 MHz 868.7 – 869.2 MHz 905.0 – 926.5 MHz 915.85 – 926.5 MHz 921.0 – 922.0 MHz (depends on the region of sale) Self-adjusting RF output power – up to 20 mW Block encryption based on AES algorithm Detector polling period – 12–300 s
Operating Temperature	-25°C~50°C
Operating Humidity	Up to 95%
IP Rating	IP54
Anti-Sabotage	Forgery prevention; Jamming detection; Tamper-resistant
Dimensions	200mm x 200mm x 51mm
Weight	0.528kg

WHY CHOOSE RAPIDETECT?

- ✓ Visual Verification of Alarms
- ✓ Solar & Battery Powered
- ✓ Filters Out False Triggers (Wildlife etc).
- ✓ Compliant with Manual Handling Regulations
- ✓ 15m 360° Intruder Detection Zone

APPLICATIONS



- ✓ Outdoor Events
- ✓ Construction Sites & Vacant Properties
- ✓ Agricultural Equipment/Assets/Livestock
- ✓ Remote Facilities

Information is subject to change without notice.